Vandal-Proof Network Speed Dome Camera SD6112V/SD6122V

Quick Installation Guide

This guide describes the basic functions of SD6112V/SD6122V. All detailed information is described in the user's manual.

6F., No. 192, Lien-Cheng Rd., Chung-Ho, Taipei County, Taiwan
Tel: +886-2-8245-5282 Fax: +886-2-8245-5532
E-mail: sales@vivotek.com http://www.vivotek.com

1 Check Package Contents

- SD6112V / SD6122V

- Hard Ceiling Mount and Decoration Ring

- Fixing Plate / Self-tapping Screws / Plastic Screw Anchors

- 50-cm Data Cable for Power Supply, Video and RS-485
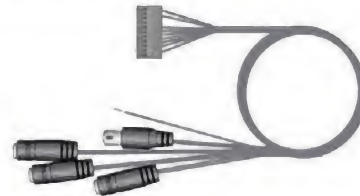
- Alarm Cable

- DC Power Adaptor & Power Cord
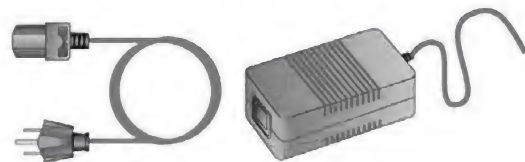
- Software CD

- Quick Installation Guide

- Warranty Card

2 Physical Description
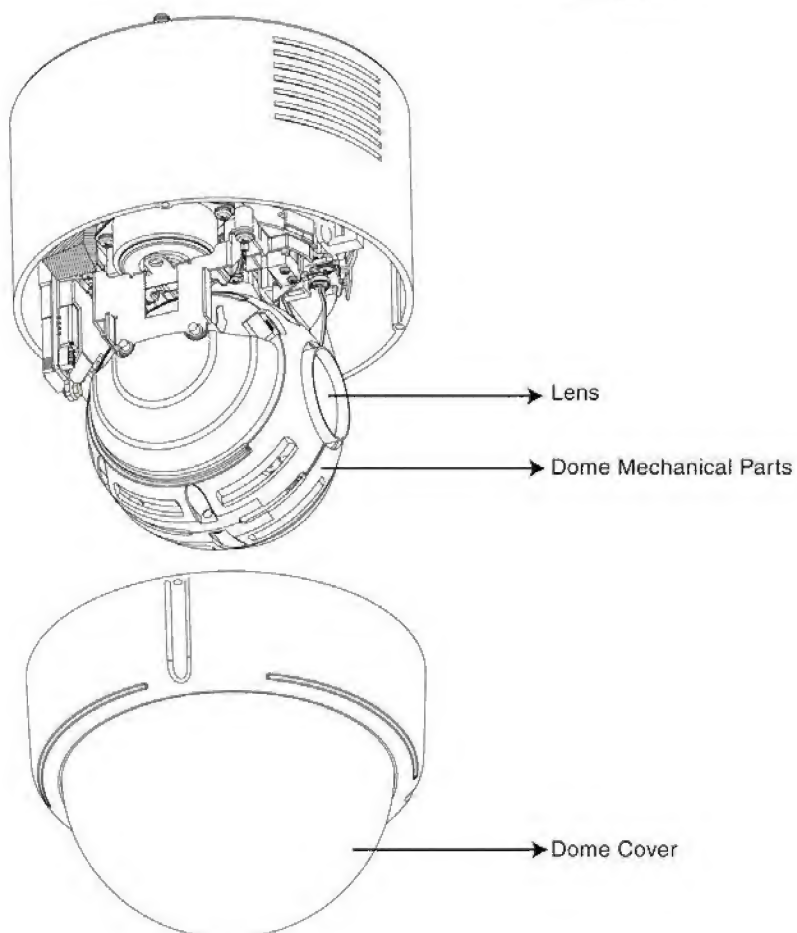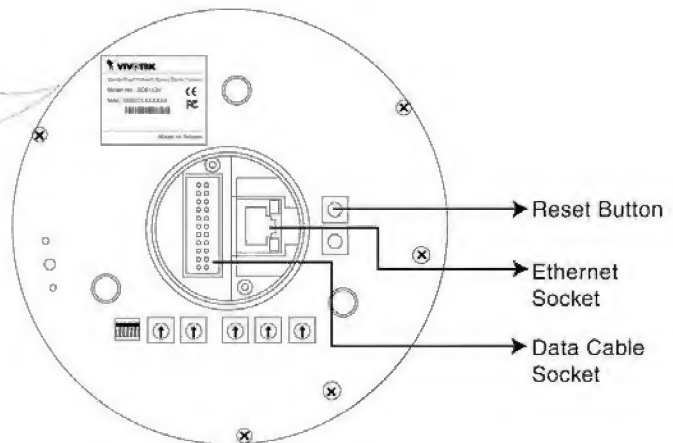
3 Installation

1.Screw the Fixing Plate to your dome body.
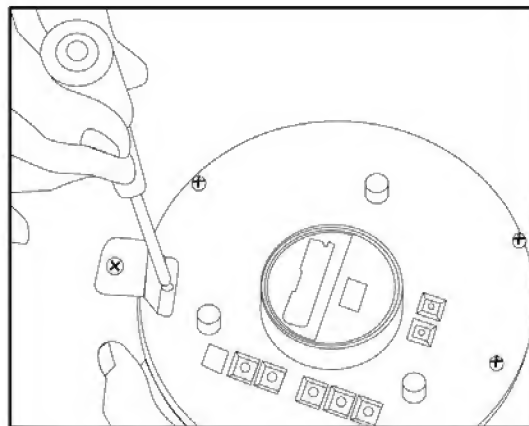
2.Remove the Hard Ceiling Mount from the Decoration Cover.
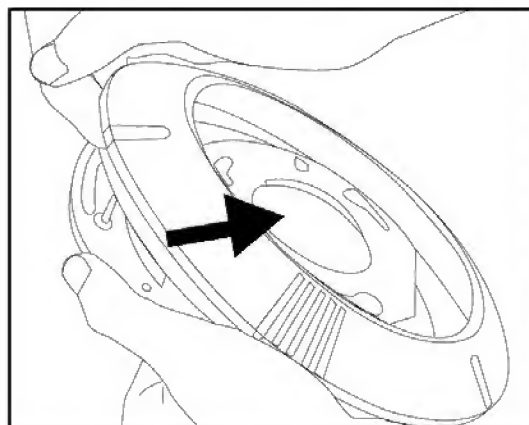
3.Attach the Mount to the ceiling.Mark the locations where all three ceiling holes should go.

4.Drill these holes on the hard ceiling.
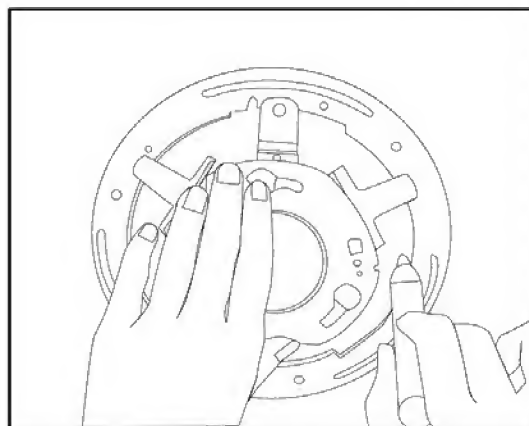
5.Fix the Mount with three screws.
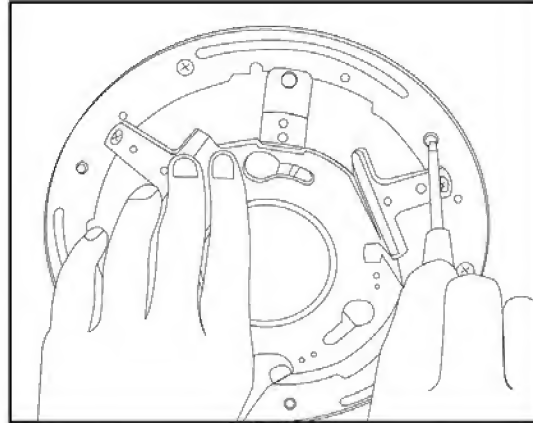
6.Connect the data cable and Ethernet through the center hole of the Mount to the dome body.
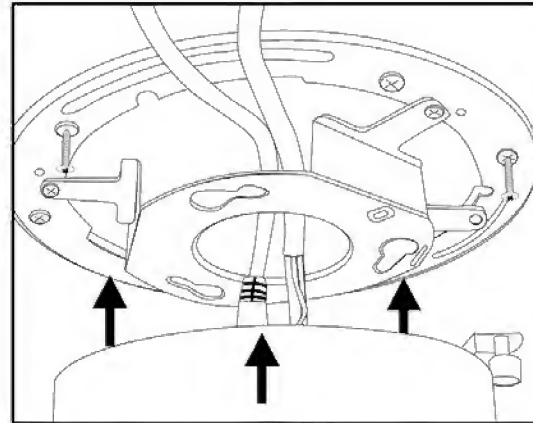
7.Make connections
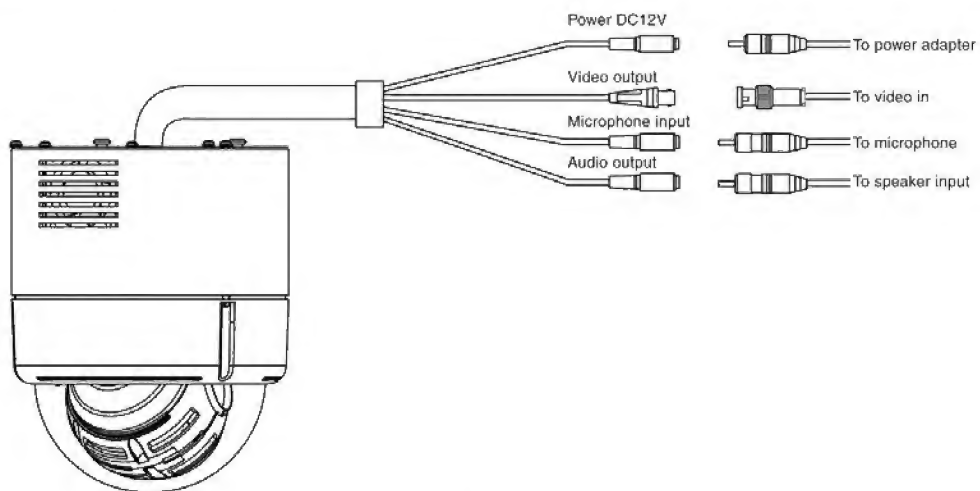
8.Attach the dome body to the Mount and rotate the dome body clockwise. Tighten the fixing screw on the fixing plate.
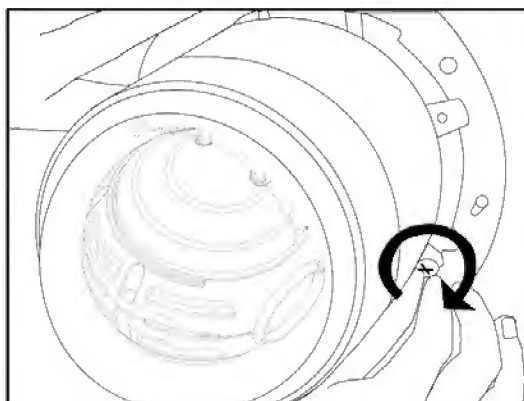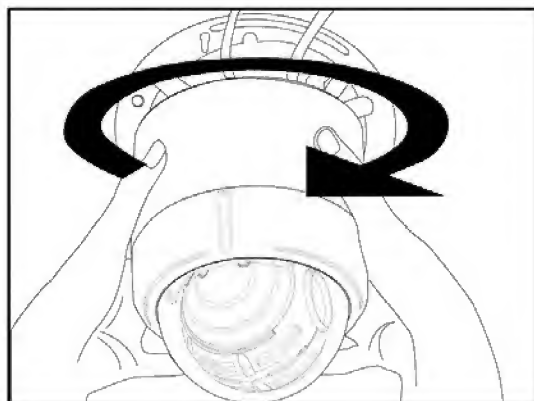
9.Assemble the Decoration Cover to the Mount.
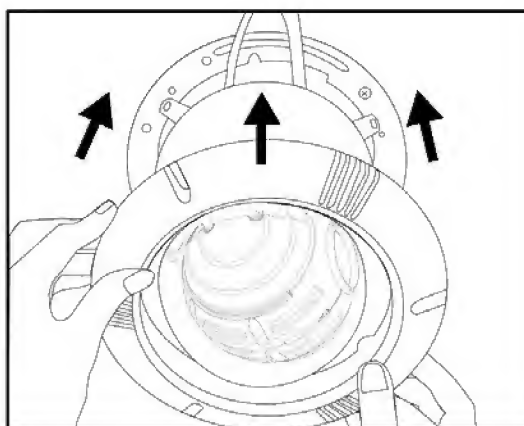
10.Completion
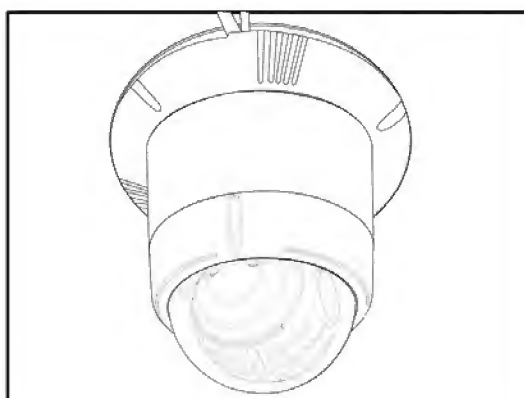
4 Assign IP Address

1. Run the "Installation Wizard" under "Utility" directory on the software CD.

2. The program will search Vivotek Video Servers or Network Cameras on the same LAN.
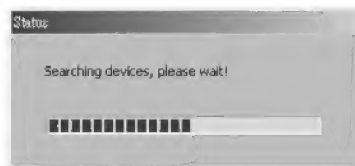
3. After searching, the main installer window will pop up. Click on the serial number that matches your Network Camera's serial number.
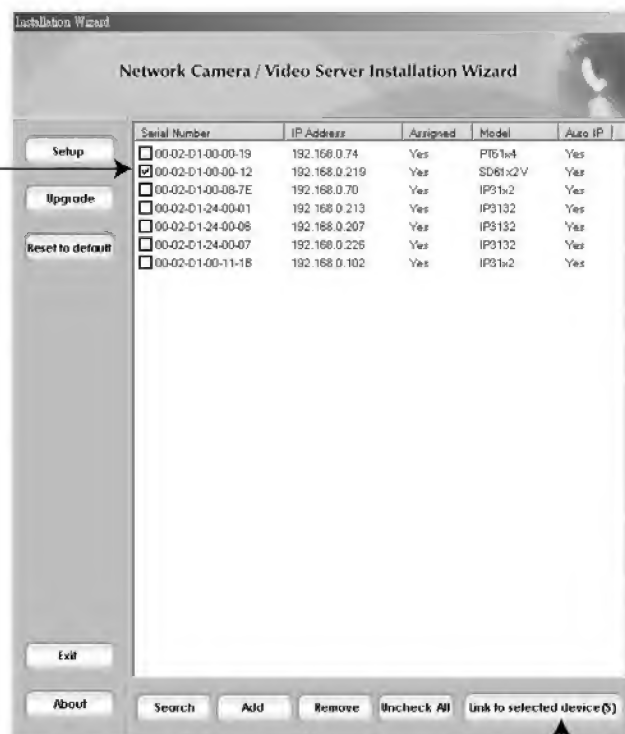
4. Click "Link to selected device(s)" to connect the Internet Explorer to the Network Camera.

※ If there is no DHCP server on the LAN, please refer to the user's manual for the methods of assigning an IP address.

The Internet Explorer Connects to the Network Camera

For further setup, please check the user's manual on the software CD.

P/N:620027200G